

INT-AC-C302

uReader-B PWR-CAN

1. Descripción - Description:



Descripción técnica del cable INT-AC-C302 para conexión de dispositivos uReader a través del conector B. Permite alimentación del equipo, conexión CAN BUS, conexión serie J1708/J1587 y DTCO-D8.

Technical description of cable INT-AC-C302 for uReader devices through the B connector. Allows power supply, CAN BUS connection, J1708/J1587 and DTCO-D8 serial connection.

La longitud de los hilos es 50cm. / The length of the wires is 50cm.

2. Esquema - Schematics:

C302

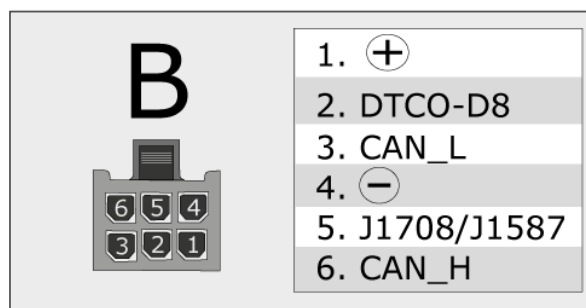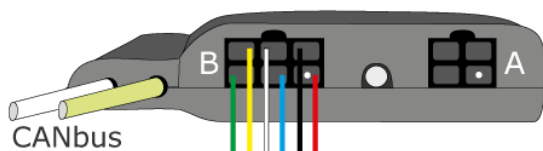

! El color de los cables se utiliza sólo como referencia. El color puede cambiar sin previo aviso. Compruebe siempre que cada cable llega al pin del conector correspondiente.

! The wire colors are only as reference. The color may change without notice. Always check that each wire reaches the correct pin of the connector.

3. Compatibilidad – Compatibility

- uReaderFMS
- uReaderGPS

Document revision History

#	Date	Author	Apvd	Changes
r01	2012/07/13	JAL	JJBMT	First release
r02	2014/04/28	JVL	JJBMT	Instructions removed Pinout changed according to Molex
r03	2015/03/03	JVL	JJBMT	Wire labels fixed (J1708 <> D8)
r04	2017/03/01	FGM	JVL	Schematics style update. Removed black cover from wire. Added new length.
r05	2017/04/24	FGM	MLG	Logo and Header contact details updated. Enlarge resolution for pictures.
r06	2020/10/15	FGM	FGM	Adapt CI + source format export to Gdoc.